


Close Type Hydraulic Quick Coupling (Steel)

ISO 7241A - bsp

Feature


- Poppet valves available to prevent uncoupled leakage.
- Poppet valves open automatically when coupled, with in rated working pressure, to keep the flow expedite.
- Critical parts are hardened for durability.
- Dependable ball-locking mechanism holds the mating halves together.
- Socket and plug are precisions machined from solid bar stock.
- Conform to the standard of ISO 7241-A.
- Compatible with PARKER 6600 Series, FASTER ANV Series, AEROQUIP 5600 Series and HANSEN HA15000 Series.

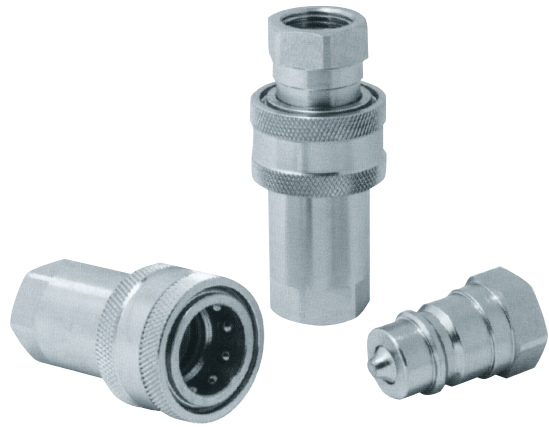

Application

ISO 7241A Series brings to the industry a proven design for use on construction equipment, forestry equipment, agricultural machinery, oil tools, oil equipment steel mill machinery, and other demanding hydraulic application.

Body Sizes (in)	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2
Rated Pressure (PSI)	5000	4000	4000	4000	4000	3000	2000	2000
Rated Flow (GPM)	3	6	12	28	50	88	220	240
Temperature Range (std seals)	-20°C to -120°C							
Standard seal material	NBR							

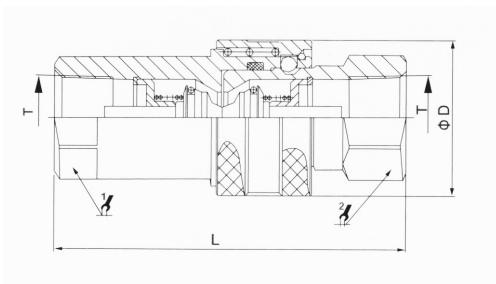

Code	ISO	L	ØD	1	2
QRC-A 04	6.3	71	26	19	13
QRC-A 06	10	75	31.5	22	14
QRC-A 08	12.5	88	38.5	27	16
QRC-A 12	20	110	48	34	18
QRC-A 16	25	119.5	56	41	21
QRC-A 20	31.5	150	69.5	50	25
QRC-A 24	40	167.5	84	60	27
QRC-A 32	50	210.5	99	75	26