


# BEAM CLAMP WITH SHACKLE

## BEAM CLAMP WITH SHACKLE

### Beam Clamp with Shackle Type SBC 1000kg-10000kg

The simple and safe attachment point. Beam clamps with adjustable flange width can be attached quickly and easily without mounting tools or auxiliary material. The jaws are pressed on the beam by a clamping spindle and thus provide a suspension point for lifting gear, pulleys etc. Even heavy constructions or sections that are otherwise difficult to grab can be quickly and easily moved with these clamps..

**Be supplied with shackle**

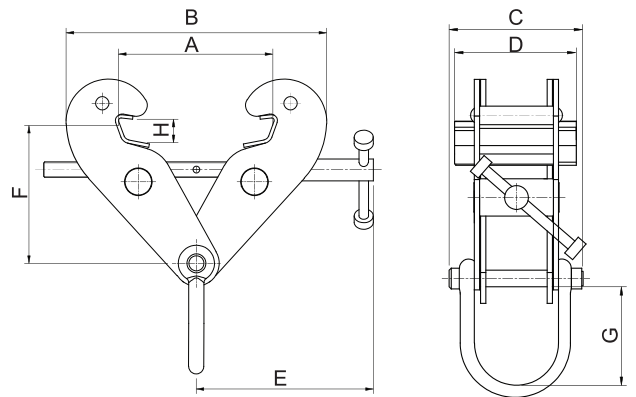

## SBC BEAM CLAMP WITH SHACKLE

Model		SBC-1	SBC-2	SBC-3	SBC-5	SBC-10	
Capacity load T		1	2	3	5	10	
Test load KN		12.3	24.5	36.8	61.3	122.5	
I-beam width range MM		75-220	75-220	80-320	80-320	80-350	
Dimensions (mm)	A max	260	260	390	390	390	
	B	Min	180	180	265	265	285
		Max	322	322	466	466	520
	C	138	156	195	237	310	
	D	122	122	150	150	200	
	M	74	80	105	129	165	
	E	220	220	262	262	273	
	F	Min	132	132	178	178	186
		Max	155	155	228	228	236
	G	88	91	108	108	176	
	K	16	22	27	34	45	
	H	22	22	35	35	35	
	S	4	6	8	10	12	
Net weight KG		5.5	6.6	13	17.5	33	