


Open Spelter Socket, Code:HG-3416

Finishing: Hot Dipped Galvanized or Painted

Meet requirement of Federal Specification RR-S-550D, Type A

Forged Steel Socket through 1.1/2", cast 1.5/8" to 4"

All sockets are grooved

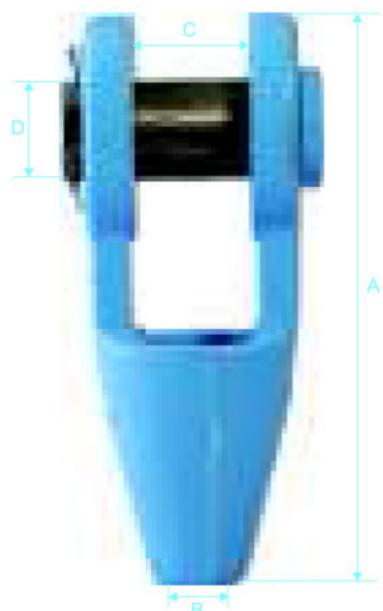

HG-3416

Code No. HG-3416-	Rope Size (dia.)		Dimensions (mm)				Weight (Kg)
	(mm)	(inch)	A	B	C	D	
-6	6-7	1/4"	116	9.7	23.1	17.5	0.50
-10	8-10	5/16"-3/8"	123	12.7	20.6	20.6	0.59
-13	11-13	7/16"-1/2"	141	14.2	25.4	25.4	1.02
-16	14-16	9/16"-5/8"	172	17.5	32	30	1.63
-18	18	3/4"	202	20.6	38.1	38.1	2.65
-22	20-22	7/8"	235	23.9	44.5	44.5	4.38
-26	24-26	1"	268	28.7	50.8	50.8	7.04
-30	28-30	1.1/8"	300	31.8	57.2	57.2	9.76
-35	32-35	1.1/4"-1.3/8"	335	38.1	63.5	63.5	14.07
-38	38	1.1/2"	384	41.4	76.2	70	21.45
-42	40-42	1.5/8"	413	44.5	76.2	76.2	24.97
-48	44-48	1.3/4"-1.7/8"	464	51	89	89	37.23
-54	50-54	2-2.1/8"	546	57	102	95.3	58.57
-60	56-60	2.1/4"-2.3/8"	597	63.5	114.3	108	75.82
-67	64-67	2.1/2"-2.5/8"	648	73	127	120.7	114.41
-73	70-73	2.3/4"-2.7/8"	692	79	133.4	127	143.01
-80	75-80	3-3.1/8"	737	86	146	133.4	172.52
-86	82-86	3.1/4"-3.3/8"	784	92	159	140	197.04
-92	88-92	3.1/2"-3.5/8"	845	98.6	171.5	152.4	255.60
-102	94-102	3.3/4"-4"	921	108	191	177.8	355.48

Closed Spelter Socket, Code:HG-3417

Finishing: Hot Dipped Galvanized or Painted

Meet requirement of Federal Specification RR-S-550D, Type B

Forged Steel Socket through 1.1/2", cast 1.5/8" to 4"

All sockets are grooved



HG-3417

Code No. HG-3417-	Rope Size (dia.)		Dimensions (mm)				Weight (Kg)
	(mm)	(inch)	A	B	C	D	
-6	6-7	1/4"	114	9.7	38	22.4	0.23
-10	8-10	5/16"-3/8"	124	12.7	43	24.6	0.34
-13	11-13	7/16"-1/2"	138	14.2	51	30	0.68
-16	14-16	9/16"-5/8"	160	17.5	67	36	1.13
-19	19	3/4"	192	20.6	76	42	1.92
-22	20-22	7/8"	222	23.9	92	48	3.28
-26	24-26	1"	251	28.7	105	58	4.76
-30	28-30	1.1/8"	279	31.8	114	65	6.46
-35	32-35	1.1/4"-1.3/8"	308	38.1	135	71.4	8.95
-38	38	1.1/2"	354	41.4	135	81	13.24
-42	40-42	1.5/8"	384	44.5	146	83	16.32
-48	44-48	1.3/4"-1.7/8"	438	51	171	95	25.96
-54	50-54	2-2.1/8"	495	57	194	111	35.83
-60	56-60	2.1/4"-2.3/8"	537	63.5	216	127	47.62
-66	63-66	2.1/2"-2.5/8"	597	73	241	140	63.50
-73	70-73	2.3/4"-2.7/8"	645	79	273	159	99.79
-80	76-80	3-3.1/8"	689	86	292	171	125.00
-85	82-85	3.1/4"-3.3/8"	743	92	311	184	142.00
-92	88-92	3.1/2"-3.5/8"	787	98.6	330	197	181.00
-102	94-102	3.3/4"-4"	845	108	362	216	246.00

*All dimensions and weight are approximate.

Wire Rope Sling End Terminations

The optimal use of wire rope strength is determined in part by its end terminations which we are manufacturing and supplying . Every kind of termination has its unique attributes which determine its suitability for one application over another.



Assorted Wire Rope Accessories:



HG-3421

Wedge Socket, Code: HS-3421

Meet Federal Specification RR-S-550D, Type C

Finishing: Painted

Rope Dia. Range: 9mm-32mm

Mooring Socket, Code: HG-3517

Finishing: Galvanized

Rope Dia. Range: 32mm-102mm

Utility Wedge Socket, Code: HS-3422

Finishing: Galvanized

Rope Dia. Range: 10mm-32mm



Wire Rope Nipper



Carpenter Stopper

*All dimensions and weight are approximate.